

Price:
NZ \$1,999

KM 2034 G

Design

Raised gas hob in high quality stainless steel
Integrated controls
Solid metal control knobs

Cooking zones

5 cooking zones for natural or liquid gas
Front left: High speed burner, up to 11.5 MJ/h
Rear left: Simmer burner, up to 4.1 MJ/h
Centre: Dual wok, up to 15.0 MJ/h
Rear right: Standard burner, up to 7.0 MJ/h
Front right: Standard burner, up to 7.0 MJ/h
Recommended pan base diameters for:
Simmer burner: 100-220 mm
Standard burner: 120-220 mm
High speed burner: 140-240 mm
Dual wok: 160-260 mm

User convenience

Rotary dial control for gas:
Electric ignition for single-handed operation

Safety

Thermoelectric ignition monitoring

Cleaning & Care

Removable matt black enamelled cast iron pot rests

Dimensions

Cut-out dimensions: Width 560 mm, Depth 480-490 mm
External appliance dimensions: Width 750 mm, Depth 520 mm

Standard accessories

Pre-fitted supply lead
Separate jets for liquid gas
Wok ring

Electrical connection


Total rated load: 0.025 kW

The final space requirements for the gas connection should be checked with a licensed gas fitter, in order to conform to local and national regulations.

Product availability, information and prices are subject to change without prior notice.

Installation drawings

These installation diagrams should be used as a planning guide only and must be read in conjunction with the operating and/or installation instructions.

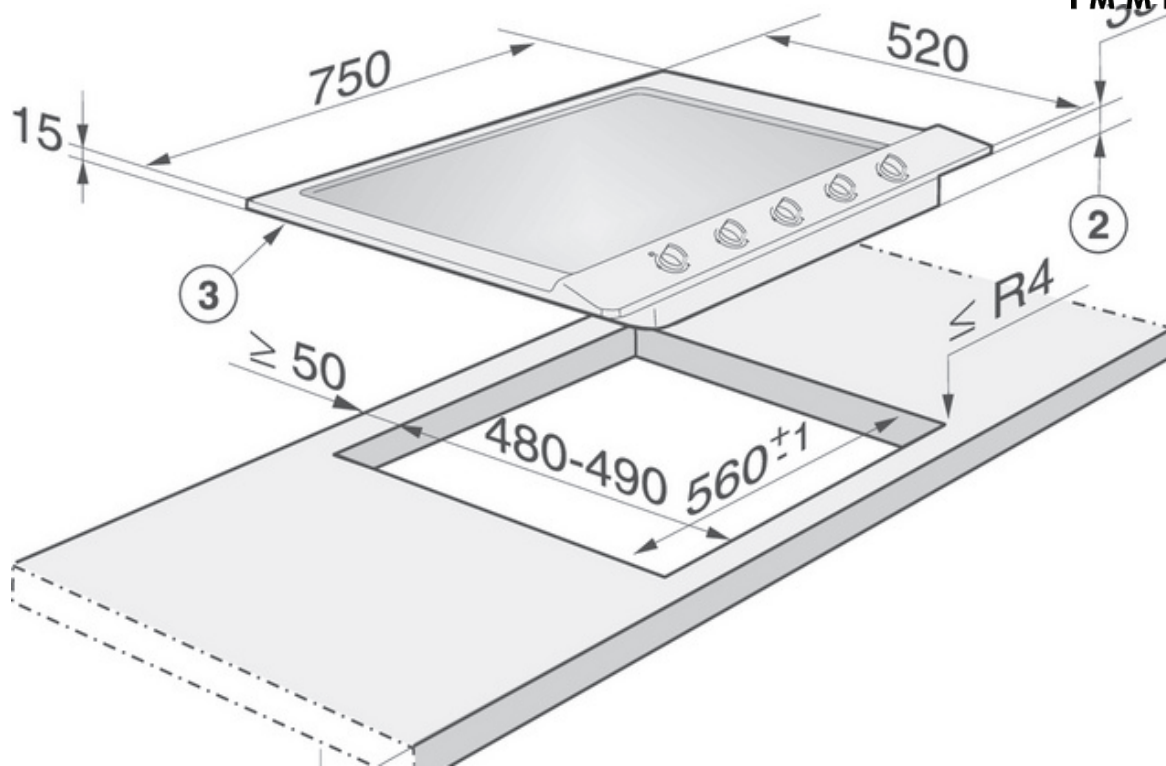

1. Front
- 2 Building-in depth
3. Gas connection R 1/2 - ISO 7-1 (DIN 2999)
4. Mains connection box with mains connection cable, L = 2000 mm